


DIN 41 612 · Type R
DIN 41 612 · complementary type 2R



Number of contacts


96, 64,
48, 32

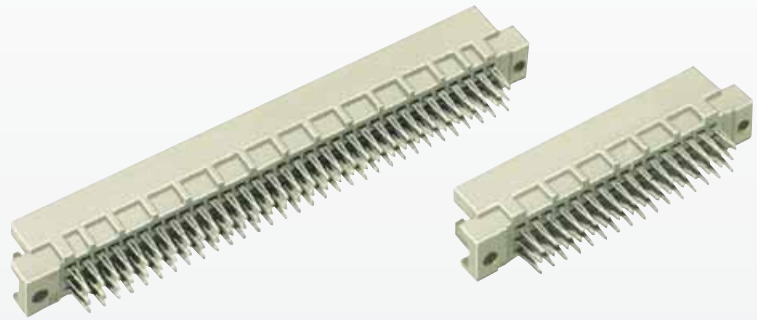

Male connectors


Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00	3	2	1
Male connector Type R with press-in terminations	5.0 mm		09 73 196 7904	09 73 196 6904	09 73 196 6904	09 73 196 6904	performance level 1 or special gold plating on request
			09 73 196 7954				
	13 mm		09 73 164 7904	09 73 164 6904			
			09 73 164 7954	09 73 164 6904			
Male connector Type 2R with press-in terminations	5.0 mm		09 73 196 7985	09 73 196 6985	09 73 196 6985	09 73 196 6985	
			09 73 196 7974*				
	13 mm		09 73 196 7995	09 73 196 6995			
			09 73 196 7995	09 73 196 6995			
Male connector Type 2R with press-in terminations	5.0 mm		09 28 148 7904	09 28 148 6904	09 28 148 6904	09 28 148 6904	
			09 28 148 7954				09 28 148 6954
	13 mm		09 28 132 7904	09 28 132 6904			
			09 28 132 7985	09 28 132 6985			
13 mm		09 28 148 7985	09 28 148 6985				
		09 28 148 7995	09 28 148 6995				
13 mm		09 28 132 7985	09 28 132 6985				
		09 28 132 7985	09 28 132 6985				

Dimensions

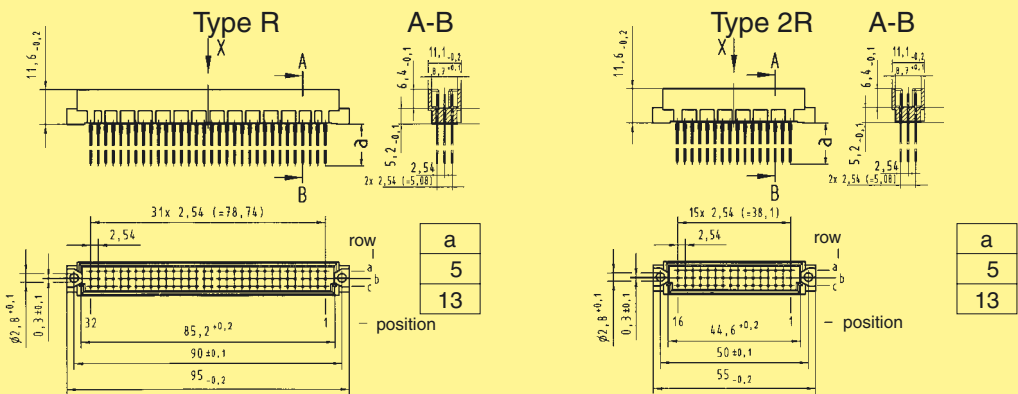

Board drillings

Mounting side

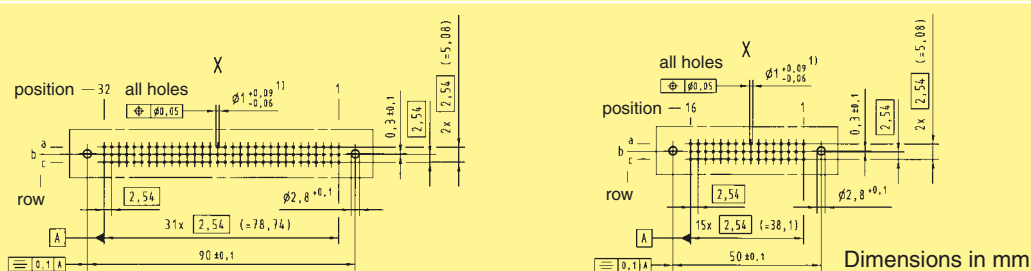

Dimensions in mm

▲ Male connectors with 2 leading contacts (0.8 mm) pos. a1 and a32/a16

• Wrap posts for interfacing selectively gold plated (performance level 3)

¹⁾ refer to recommended configuration of pcb holes, see page 04.04

Other contact arrangements also with lagging pins on request