




Plastic hood with internal metal screen

Identification No. of contacts Part No. Drawing Dimensions in mm

Plastic hood with internal screen
for male and female pin and socket range and
for female bellows range

50 60 03 050 01 ...
68 60 03 068 01 ...
100 60 03 100 01 ...


With male jack screw 2-56 UNC 43
With male jack screw 4-40 UNC 46

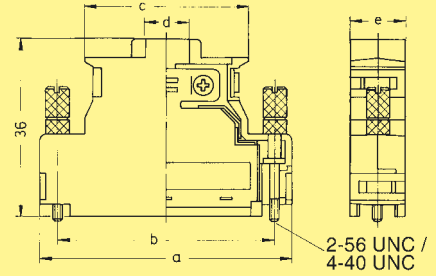

	a	b	c	d	e
50	54.00	46.48	35.00	10.50	12.00
68	65.41	57.91	38.40	14.00	12.00
100	85.73	78.23	42.00	13.00	12.00

Plastic hood with internal screen
for male bellows range

20 60 13 020 0153
26 60 13 026 0153
36 60 13 036 0153
50 60 13 050 0153
68 60 13 068 0153
80 60 13 080 0153

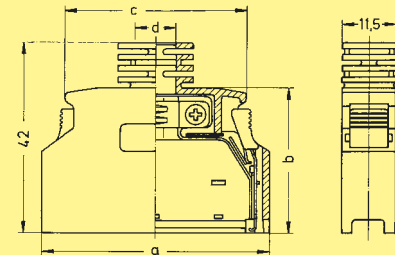

	a	b	c	d
20	29.65	34.50	19.95	6.80
26	33.46	38.31	23.76	7.10
36	39.81	32.00	30.11	8.20
50	48.70	32.00	39.00	8.70
68	60.13	32.00	50.43	9.10
80	67.75	32.00	58.05	9.70

harmik