



Female connectors, angled

Identification	No. of contacts	Contact length [mm] termination side	Part number
Type B, VME (Position P0)	95	3.4	17 25 095 1101 17 25 095 2101
Type B, VME with upper shield (Position P0)	95	3.4	17 25 095 1102 17 25 095 2102
Lower shield for type B connectors with 95 contacts			17 25 000 4102


VME64X

Without shielding


With shielding

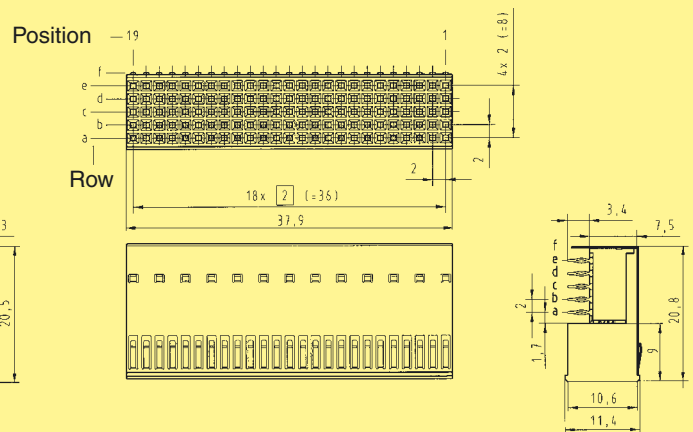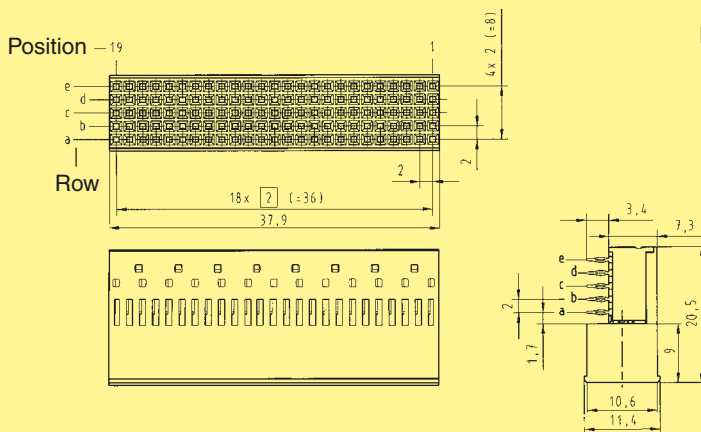

Board drillings

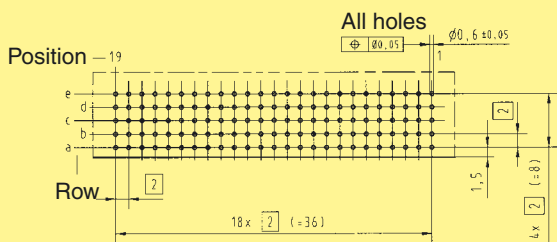

Board drillings

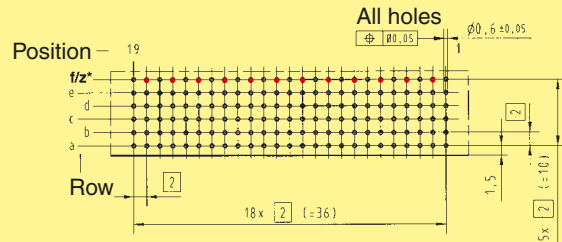

Dimensions [mm]

Thin print part numbers: performance level 1
Bold print part numbers: performance level 2

* hole on even contact numbers only needed for lower shielding